




N-SERIES |

NLR • NMR • NQR • NQR xtra • NPS

N-Series brings higher performance on every level with styling, power, economical operation and safety features geared to increased capacity.

By offering a wide range of GVM, N-Series meets the needs of businesses with a model perfect for every application while working in harmony with society and the environment.

DIMENSION

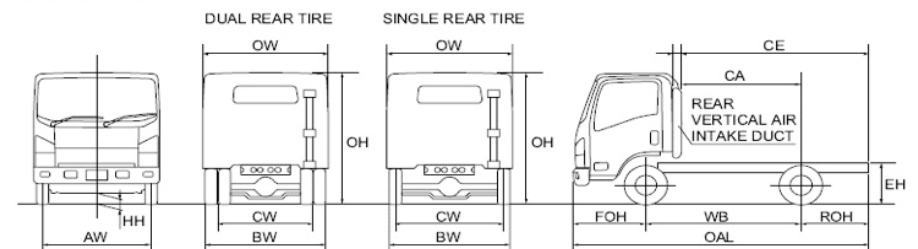

0724 256 665

ISUZU

Ryce
EAST AFRICA LTD

7TH GENERATION N-SERIES SPECIFICATIONS

MODEL					
	NLR77E	NMR85H	NQR81K	NQR Xtra	NPS81H
Axle Layout	4 x 2	4 x 2	4 x 2	4 x 2	4 x 2
Rear tyre	Single	Dual	Dual	Dual	Dual
ENGINE					
Model	4JH1-TC	4JJ1-TCC	4HL1-TCS	4HL1-TCS	4HL1-TCS
Type	Diesel 4 cylinder, Common Rail Turbocharged with Intercooler	Diesel 4 cylinder, Common Rail Turbocharged with Intercooler	Diesel 4 cylinder, Common Rail Turbocharged with Intercooler	Diesel 4 cylinder, Common Rail Turbocharged with Intercooler	Diesel 4 cylinder, Common Rail Turbocharged with Intercooler
Displacement (cc)	2999	2999	4778	4778	4778
Max Output, hp (kW) @ rpm	106 (77) @ 3,200	130 (96) @ 2,800	150 (114) @ 2,600	150 (114) @ 2,600	150 (114) @ 2,600
Max Torque, Nm (Kgm) @ rpm	230 (23.5) @ 1,500-3,200	330 (33.7) @ 1,500-2,600	402 (41) @ 1,500-2,600	402 (41) @ 1,500-2,600	402 (41) @ 1,500-2,600
Pre-air cleaner & h gh air ntake pipe	Standard	Standard	Standard	Standard	Standard
Fuel water sed mentors	Standard	Standard	Standard	Standard	Standard
Heavy duty radiator	Standard	Standard	Standard	Standard	Standard
Emission	Euro II	Euro II	Euro II	Euro II	Single Dry Plate
CLUTCH					
Type	Single Dry Plate	Single Dry Plate	Single Dry Plate	Single Dry Plate	
Diameter (mm/inch)	300/12"	300/12"	325/13"	325/13"	325/13"
Operation	Hydraulic Control	Hydraulic Control	Hydraulic Control	Hydraulic Control	Hydraulic Control
TRANSMISSION					
Make/Model	MSB-5S	MYV-5T	MYV-6S	MYV-6S	MYV-5T
LSD					Standard
SUSPENSION					
Front&Rear	Semi-Elliptical alloy steel leaf springs with Double Acting Telescopic Shock Absorbers				
BRAKES					
System	Vacuum Assisted, Hydraulic Dual Circuit	Vacuum Assisted, Hydraulic Dual Circuit	Vacuum Assisted, Hydraulic Dual Circuit	Hydraulic Brake Booster, Hydraulic Dual Circuit	Vacuum Assisted, Hydraulic Circuit with LSPV
Front & Rear	Drum	Drum	Drum	Drum	Drum
Park Brake	Mechanical,at rear of Transmission	Mechanical,at rear of Transmission	Mechanical,at rear of Transmission	Mechanical,at rear of Transmission	Mechanical,at rear of Transmission
Auxillary	Exhaust Brake	Exhaust Brake	Exhaust Brake	Exhaust Brake	Exhaust Brake
Speed Limiter	80km/h	80km/h	80km/h	80km/h	80km/h
STEERING					
Operation	Power	Power	Power	Power	Power
Tilt	Standard	Standard	Standard	Standard	Standard
CAB					
Type	Tilt Cabin Construction	Tilt Cabin Construction	Tilt Cabin Construction	Tilt Cabin Construction	Tilt Cabin Construction

	Laminated Curved	Laminated Curved	Laminated Curved	Laminated Curved	Laminated Curved
Windshield					
Seat Belt		3 Point x 2 for driver & assistant Seat, 2 Point x 1 for centre Seat			
CD player W,USB	Standard	Standard	Standard	Standard	Standard
MODEL	NLR77E	NMR85H	NQR81K	NQR Xtra	NPS81H
Axle Layout	4 x 2	4 x 2	4 x 2	4 x 2	4 x 2
Rear tyre	Single	Dual	Dual	Dual	Dual
WHEELS & TYRES					
Tubeless tyre			Standard		
Tyre Size	215/80R 16	7.00R16	225/80R17.5	225/80R 17.5	8.5R17.5
Rim Size	16 x 5.5	16 x 5.5	17.6 x 6	17.6 x 6	17.6 x 6
FUEL TANK					
Capacity	75	100	100	100	100
Fuel Tank Lock			Standard		
FRONT AXLE					
Front Axle Capacity	2900	2900	3300	3300	2800
REAR AXLE					
Rear Axle Capacity	3600	5000	6600	6600	6600
Final Drive Ration(:1)	5.125	5.125	4.777	5.125	5.571
ELECTRICAL SYSTEM					
Battery	12V-N90	12V-NS70 X 2	12V-NS70 X2	12V-NS70 X2	12V-NS70 X2
Alternator	12V-60A	24V-90A	24V-80A	24V-80A	24V-80A
DIMENSIONS(MM)					
OL-Overall Length	4730	6030	6635	7355	5895
OW-Overall Width	1815	1815	2040	2040	2040
OH-Overall Height	2150	2160	2275	2275	2455
WB-Wheelbase	2475	3345	3815	4475	3395
FOH-Front Overhang	1110	1110	1110	1110	1110
ROH-Rear Overhang	1145	1575	1710	2070	1510
BW-Rear Axle Width	1590	1860	2125	2125	2125
FT-Front Track	1475	1475	1680	1680	1680
RT-Rear Track	1395	1425	1650	1650	1650
EH-Chassi Rear End Height	700	770	830	830	770
HH-Rear Ground Clearance	190	195	220	220	210
CWF- Front Chassis Width	740	740	850	850	850
CWR-Rear Chassis Width	700	700	850	850	850
CE-Cab to Chassis Width	3120	4345	4950	5995	4300
CA-Cab to Axle	1900	2770	3240	3925	2790
WEIGHT (KG)					
Gross Vehicle Weight	4100	5700	8000	8500	6000
Cab Chassis Mass	1725	2090	2760	2845	2910



0724 256 665

ISUZU

